
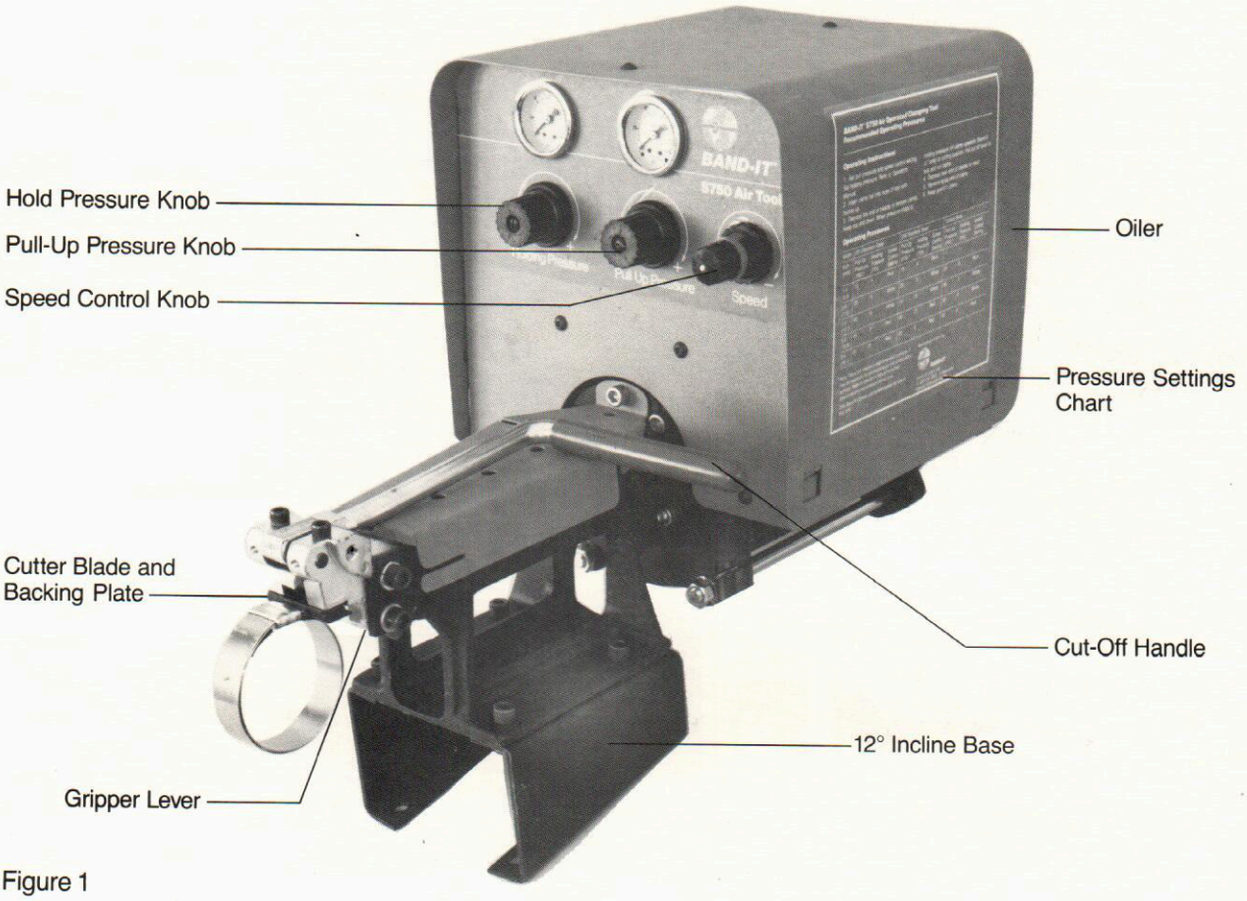


Figure 1

Air Line Requirements

Air line pressure: min 689.5, max 1034.2 kPa
Consumption: 84.95-141.58 L/min
Line size: 6.35 mm I.D. minimum
Connection: 1/4 NPT (original thread)
Filter/Lubricator: Located in Air Supply in back of Air Tool.
Lubricant: SAE 10 Wt. Non-Detergent Motor Oil

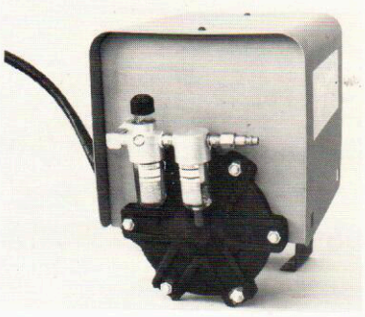

Safety Procedures

1. Familiarize yourself with operating procedures before operating the S750 Air Tool.
2. Do not operate tool without cover in place.
3. Use only recommended Band-It preformed clamps.
4. Do not exceed recommended pressure settings. Excess pressure may cause sudden clamp failure during application or result in an unsafe clamp.
5. Always keep fingers clear of clamp during application.
6. Disconnect air supply before servicing air tool.
7. Tool must be firmly mounted (see Installation Instructions, Page 4).
8. Safety glasses or goggles should be worn when applying clamps.
9. Always keep tool in good operating condition.

UES Promura - Product enquiries

+61 3 9547 5833 | sales@uespromura.com.au | uespromura.com.au

10-12 McWilliam Street, Springvale VIC 3171, Australia