UES Promura
ENGINEERING & INDUSTRIAL SOLUTIONS
ESTABLISHED 1966

PRODUCT CATALOGUE
September 2026

SPECIFIED BY BUILDERS SINCE 1938

Promura Building Products

Concrete additives, expansion jointing, dampcourse, flashing and wall ties — made for Australian builders and bricklayers.

01 **Concrete Additives** — Page 1
Promura 100, 200, XX, 88 & Bond Mate 500

02 **Foam Expansion Jointing** — Page 2
Standard & adhesive-backed rolls

03 **Dampcourse & Flashing** — Page 3
Polythene dampcourse, Malthoid, aluminium & bitumen-coated aluminium

04 **Brick & Wall Ties** — Page 4
Brick ties, veneer ties, control gap ties, frame ties & vents

ADVICE & CUSTOMER SERVICE

(03) 9547 5833
sales@uespromura.com.au
www.uespromura.com.au

WAREHOUSE

10 – 12 McWilliam Street
Springvale Vic 3171
Fax (03) 9548 1537

Polaris Nominees Pty Ltd ACN 005 089 207 trading as UES Promura · ABN 55 155 859 127

(03) 9547 5833 · sales@uespromura.com.au
uespromura.com.au

01 Concrete Additives

Every additive is available in 2.5, 5 and 20 litre packs.

WATERPROOFER

Promura 100 Clear Cement Waterproofer

Waterproofs mortar, external & internal cement render.

USE 1 L per 20 L of water, or 1 L per 40 kg of cement. Cement to sand ratio must be 1 to 3.

2.5L	5L	20L
2L100	5L100	20L100
Ctn 6	Ctn 4	Ctn 1

ACCELERATOR

Promura 200 Quick Setter

Reduces the setting time of concrete.

USE 2.5 to 5 L per 40 kg of cement, depending on concrete strength.

2.5L	5L	20L
2L200	5L200	20L200
Ctn 6	Ctn 4	Ctn 1

PLASTICISER · FATTY SANDS

Promura XX Mortar Plasticiser

Suitable for use with “fatty” sands.

USE 30 ml per 40 kg of cement, or 250 ml per 200 L of water.

2.5L	5L	20L
2LXX	5LXX	20LXX
Ctn 6	Ctn 4	Ctn 1

PLASTICISER · COARSE SANDS

Promura 88 Mortar Plasticiser

Makes cement more workable. Suitable for use with “coarse, hungry sand”.

USE 30 – 60 ml per 40 kg of cement, depending on the type of sand.

2.5L	5L	20L
2L88	5L88	20L88
Ctn 6	Ctn 4	Ctn 1

BONDING AGENT

Promura Bond Mate 500 PVA Bonding Agent

Gives perfect adhesion for plaster or cement rendering.

USE Coat surface with a half-strength solution of Promura Bond Mate.

2.5L	5L	20L
2LBond Mate	5LBond Mate	20LBondMate
Ctn 6	Ctn 4	Ctn 1

WARNING The customer shall conduct their own test to determine the suitability and the fitness of the product for the customer’s intended use.

(03) 9547 5833 · sales@uespromura.com.au
uespromura.com.au

02 Flex Foam Expansion Jointing

Zipped 25 metre rolls, plain or with adhesive backing.

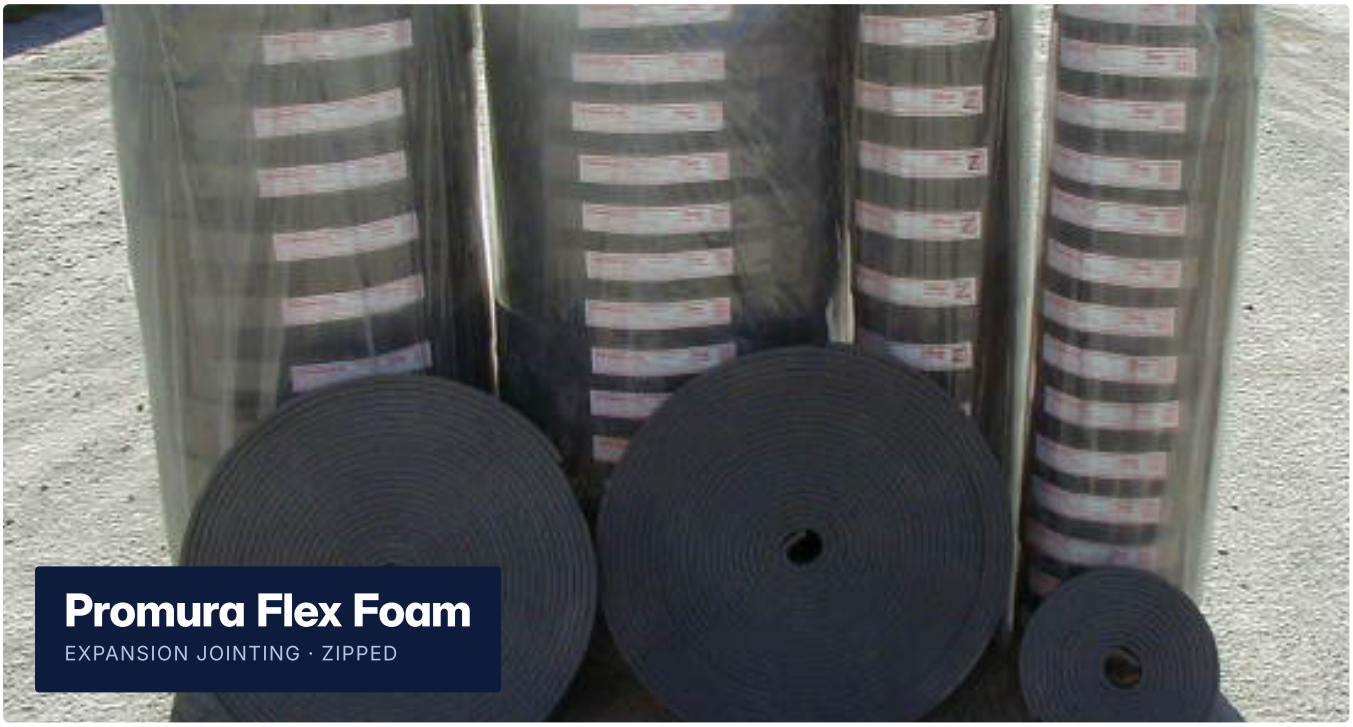

ROLL LENGTH	THICKNESS	WIDTHS
25 m	**10 mm**	**75 – 200 mm**

Standard

Promura Flex Foam Expansion Jointing · 25 m × 10 mm

ITEM CODE	WIDTH	QTY / PACK
Flex 25m 75mm	75 mm	15
Flex 25m 100mm	100 mm	12
Flex 25m 125mm	125 mm	9
Flex 25m 150mm	150 mm	8

Adhesive backed

Adhesive Backed Flex Foam · 25 m × 10 mm

ITEM CODE	WIDTH	QTY / PACK
Flex Adhes 75	75 mm	15
Flex Adhes 100	100 mm	12
Flex Adhes 125	125 mm	9
Flex Adhes 150	150 mm	8
Flex Adhes 200	200 mm	6

WARNING The customer shall conduct their own test to determine the suitability and the fitness of the product for the customer's intended use.

(03) 9547 5833 · sales@uespromura.com.au
uespromura.com.au

03 Dampcourse & Flashing

Polythene, Malthoid and aluminium rolls in standard brickwork widths.

Black Embossed Polythene Dampcourse

500 MICRON · 30 M ROLLS

ITEM CODE	WIDTH	LENGTH	CTN QTY
EMB110 R (12)	110 mm	30 m	12
EMB150 R (8)	150 mm	30 m	8
EMB230 R (8)	230 mm	30 m	8
EMB300 R (6)	300 mm	30 m	6
EMB380 R (4)	380 mm	30 m	4

2 Ply Malthoid Roofing & Dampcourse

2 PLY · 20 M ROLLS

ITEM CODE	WIDTH	LENGTH
MAL110	110 mm	20 m
MAL150	150 mm	20 m
MAL230	230 mm	20 m
MAL1000	1000 mm	20 m

Raw Aluminium Window Flashing

0.3 MM · 10 M ROLLS

ITEM CODE	WIDTH	LENGTH
RAW15010	150 mm	10 m
RAW23010	230 mm	10 m
RAW30010	300 mm	10 m

Standard Bitumen Coated Aluminium

0.3 MM · 10 M ROLLS

ITEM CODE	WIDTH	LENGTH
STD110	110 mm	10 m
STD150	150 mm	10 m
STD230	230 mm	10 m
STD300	300 mm	10 m

WARNING The customer shall conduct their own test to determine the suitability and the fitness of the product for the customer's intended use.

(03) 9547 5833 · sales@uespromura.com.au
uespromura.com.au

04 Brick & Wall Ties

Galvanised and 316 stainless steel ties, plus vents.

ITEM CODE	DESCRIPTION	PACK QTY
WALLDR(500) C	Double Ring Brick Tie 50mm Cavity (10 bags of 50) GALV	500
WALLUSHD120C	Wall Tie U-Shaped Heavy Duty 120mm Cavity (10 bags of 25) GALV	250
V Form Tie	V Form Vertical Control Gap Tie GALV	20
V Form 316SS	V Form Vertical Control Gap Tie 316 SS	20
VENTSLIM (20)	Vent 230 × 75mm GALV	40
VENTSF230165	Vent 230 × 165mm Subfloor Vent Square Bars GALV	20
SLIMTIEFF	Face Fix Veneer Ties with Nails 20mm × 105mm, max. 50mm cavity	150
SLIM 316SS	Face Fix Veneer Ties with Nails 20mm × 105mm, max. 50mm cavity 316 SS	150
FRAME TIES	Frame Ties 230mm × 25mm (150 per pack) GALV	150
EXPTIE90DEG	Expansion Ties Metal Slide 90 degree	50
EXPTIEPLAS	Expansion Ties with Plastic Slide	50

GALV Galvanised 316 SS 316 stainless steel

WARNING The customer shall conduct their own test to determine the suitability and the fitness of the product for the customer's intended use.