UES Promura
ENGINEERING & INDUSTRIAL SOLUTIONS
ESTABLISHED 1966

UES PROMURA 60 YEARS 1966 – 2026 CELEBRATING

Hose Clamps BAND-IT®

BAND-IT®

Preformed, Ultra-Lok and centre punch clamps, band, buckles and the tools to install them.



- JR smooth ID preformed clamps · 201 SS 2
- Ultra-Lok® clamps · 201 SS ¼ hard 3
- Centre punch clamps · 201 SS 4
- Band & buckles · 201 SS 5
- 201 vs 316 stainless steel 5
- Giant band & buckles · 201 SS 6
- Uncoated band & buckles · 316 SS 6
- ID tags 7
- Ball-Lokt™ cable ties · 316 SS 7
- Tool instruction manuals 8

● 201 stainless steel ● 316 stainless steel ● Reference & tools

Your BAND-IT® distributor

UES Promura
10-12 McWilliam Street
Springvale VIC 3171

(03) 9547 5833
sales@uespromura.com.au
www.uespromura.com.au

Polaris Nominees P/L · ACN 005 089 207 · trading as UES Promura · ABN 55 155 859 127

BAND-IT® JR smooth ID preformed clamps 201 SS

UES Promura
ENGINEERING & INDUSTRIAL SOLUTIONS ESTABLISHED 1966
BAND-IT® Hose Clamps

201 stainless steel

Code	Box qty	Clamp ID mm	Clamp width mm	Thickness mm
JS240	100	20.60	6.35	0.51
JS201	100	20.60	9.53	0.64
JS242	100	25.40	6.35	0.51
JS243	100	25.40	9.53	0.64
JS203	100	25.40	12.70	0.76
JS204	100	31.80	12.70	0.76
JS241	100	34.90	6.35	0.51
JS202	100	34.90	9.53	0.64
JS252	100	38.10	6.35	0.51
JS231	100	38.10	12.70	0.76
JS205	100	38.10	15.88	0.76
JS236	100	44.50	12.70	0.76
JS206	100	44.50	15.88	0.76
JS253	100	50.80	6.35	0.51
JS245	100	50.80	9.53	0.64
JS237	100	50.80	12.70	0.76
JS207	100	50.80	15.88	0.76
JS208	100	57.20	15.88	0.76
JS221	100	63.50	9.53	0.64
JS233	100	63.50	12.70	0.76
JS209	100	63.50	15.88	0.76
JS230	100	69.90	12.70	0.76
JS210	50	69.90	19.05	0.76
JS246	100	76.20	9.53	0.64
JS234	100	76.20	12.70	0.76
JS211	50	76.20	19.05	0.76
JS212	50	88.90	19.05	0.76
JS247	100	88.90	12.70	0.76
JS213	25	101.60	19.05	0.76
JS214	25	114.30	19.05	0.76
JS215	25	127.00	19.05	0.76
JS216	25	152.40	19.05	0.76

BAND-IT® 316 stainless steel clamps available on request.

As stiffer, thinner hose materials replace soft, thick-walled rubber, BAND-IT® developed the Smooth ID JR® preformed clamp in 201 and 316 steel. Its uniform, gap-free inside diameter virtually eliminates leaks, and double-wrapped band adds strength.

The Lip-lock design resists vibration — no hammering or crimping. Apply with the C001 tool and the J001 or J050 adapter depending on size, or the S750 pneumatic tool for high-speed, high-volume work.







S750 pneumatic junior clamp tool



C001



J050



J001

Tool	Use
C001	BAND-IT® tool to use with adapters — 2 kg
J001	Adapter, recommended for band width < 13 mm
J050	Heavy-duty adapter, recommended for band width > 10 mm

ULTRA-LOK® clamps

201 SS ¼ hard · 0.76 mm thick

UES Promura
ENGINEERING & INDUSTRIAL SOLUTIONS
ESTABLISHED 1966

BAND-IT® Hose Clamps

201 stainless steel

Designed for quick installation, the highest clamping force and a gap-free inside diameter — the best choice for demanding applications.




- Strongest band clamping system available.
- Double-wrapped ¼ hard 201 SS for superior strength.
- Unique lock formed under full tension maximises tightness.
- Thicker buckle is 2–3 times stronger than other preformed clamps.
- Smooth inside diameter designed to eliminate leak paths.
- Buckle hood protects the lock from snags.
- Apply with UL4000-D Portable Tool.

Code	Box qty	Clamp ID mm	Clamp width mm	Box weight kg
UL2109	50	69.9	19.05	4.3
UL2119	50	76.0	19.05	4.8
UL2129	50	88.9	19.05	5.4
UL2139	25	101.6	19.05	2.9
UL2149	25	114.3	19.05	3.2
UL2159	25	127.0	19.05	3.4
UL2709	25	133.4	19.05	3.3
UL2179	25	165.1	19.05	4.2
UL2189	25	177.8	19.05	4.4
UL2289	10	228.6	19.05	2.3








UL4000-D 18 V rechargeable cordless tool

Applies all BAND-IT® Ultra-Lok clamps. Tap the image to open the instruction manual.

BAND-IT® centre punch clamps 201 SS · 0.64 mm thick

Designed to meet your specific application. Double-wrapped in 201 stainless steel or galvanised steel, for less demanding applications where minimising leaks and longevity are not critical. Locked by a hammer impact through a conical punch built into the tool.

Code	Box qty	Clamp ID mm	Clamp width mm	Box weight kg
CP3S99	100	20	9.53	1.8
CP4S99	100	25	15.88	3.9
CP5S99	100	32	15.88	3.8
CP6S99	100	38	15.88	4.1
CP7S99	100	44	15.88	4.4
CP8S99	100	51	15.88	4.3
CP9S99	100	57	15.88	5.3
CP10S9	50	64	15.88	2.6
CP11S9	50	70	15.88	3.0
CP12S9	50	76	15.88	2.9
CP14S9	50	89	15.88	3.2
CP16S9	25	102	15.88	1.9
CP18S9	25	114	15.88	2.0
CP20S9	25	127	15.88	2.2
CP24S9	25	152	15.88	2.6
CP28S9	25	178	15.88	2.9
CP32S9	25	203	15.88	3.1

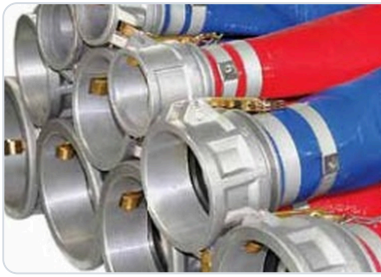



Instruction manual

T300 centre punch tool

201 stainless steel

BAND-IT® 201 stainless steel bands 201 SS · 30.5 m roll

UES Promura
ENGINEERING & INDUSTRIAL SOLUTIONS
ESTABLISHED 1966
BAND-IT® Hose Clamps

201 vs 316 stainless steel Choosing your steel

The BAND-IT® type 201 stainless steel non-magnetic band is the preferred option for general banding applications, offering high tensile strength and good resistance to oxidation and weathering. Available in a range of widths and thicknesses.

EASYSCALE imprinted measurements on the band help you cut to length and eliminate costly waste. Packaged in a standard box or a durable plastic tote for easy dispensing.

Code		Width mm	Thickness mm	Weight kg
C202		6.35	0.51	0.9
C203	Yellow tote	9.53	0.64	1.5
C204	Blue tote	12.70	0.76	2.4
C205	Green tote	15.88	0.76	3.0
C206	Red tote	19.05	0.76	3.6

Buckle code	Width mm	Weight kg	Box qty
C252	6.35	0.1	100
C253	9.53	0.3	100
C254	12.70	0.8	100
C255	15.88	0.9	100
C256	19.05	1.5	100



Ear-Lokt™ buckles in widths to suit every BAND-IT® 201 band.



C001
BAND-IT® tool for bands 6–20 mm wide
Weight 2 kg


201 vs 316 stainless steel

Select the steel to suit the tensile strength or corrosion-resistance specification of your project.

Corrosion resistance	201 stainless steel	316 stainless steel
Mild atmospheric & fresh water	Good	Excellent
Industrial atmosphere	Good	Very Good
Marine atmosphere	Fair	Very Good
Salt water	No	Good
Mild chemical	Fair	Good
Oxidising chemical	Fair	Good
Reducing chemical	No	Good
Ultimate tensile strength	**690 MPa**	**550 MPa**

BAND-IT® Giant band
201 SS · 30.5 m roll · 1.12 mm thick

BAND-IT® 316 stainless steel band
Uncoated · 30.5 m roll

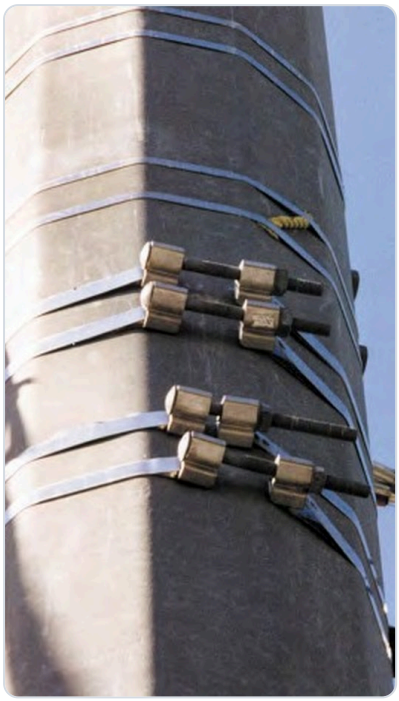

Giant Band is tough where tough counts. It produces the strongest band clamp on the market, can be formed into a single or double-wrapped clamp, and offers the widest and thickest band for maximum strength. 201 stainless steel offers good resistance to oxidation and many moderately corrosive agents.

Code	Width mm	Weight kg
G430	19.05	5.2
G431	25.40	6.8
G432	31.75	8.5
Giant buckles · 25 per pack		
G440	19.05	0.8
G441	25.40	1.0
G442	31.75	1.4



Giant Ear-Lokt™ buckles for BAND-IT® Giant band.



G402
BAND-IT® Giant tool for bands 19.05–31.75 mm wide × 1.12 mm thick
Weight 5 kg

Uncoated · 30.5 m roll

Uncoated 316 SS band

Code	Width mm	Thickness mm	Weight kg
C403	9.53	0.64	1.5
C404	12.70	0.76	2.4
C406	19.05	0.76	3.6
Buckles · 100 per pack			
C453	9.53		0.3
C454	12.70		0.8
C456	19.05		1.5



Ear-Lokt™ buckle for uncoated 316 SS band



C001
BAND-IT® tool for bands 6–20 mm wide
Weight 2.0 kg

ID tagging system 316 SS · 100 per pack

Ball-Lokt™ stainless steel cable ties 316 SS · 100 per pack

Identify cable bundles or hose assemblies with permanent, imprinted 316 stainless steel tags applied with Ball-Lokt™ ties. An ID tag imprinter is available with a choice of character sizes.

Code	Length mm	Width mm	Weight kg
ID440	51	19	0.3
ID441	63	38	0.8
ID442	89	19	0.5

Ball-Lokt™ stainless steel cable ties

From identification tagging to bundling cables, Ball-Lokt™ ties in 316 stainless steel last longer than nylon ties, especially in extreme climates. The epoxy-coated ties are UV resistant and resist cracking at low temperatures and in harsh conditions.

The self-locking design installs by hand or with the KS652 tool for uniform tension and a clean, safe tail cut-off.

Code	Length mm	Width mm	Weight gm
KT6U046-200	200	4.6	250
KT6U046-350	350	4.6	400
KT6U046-500	500	4.6	500
KT6U078-200	200	7.8	500
KT6U078-350	350	7.8	750
KT6U078-500	500	7.8	900
Black epoxy fully coated Ball-Lokt™ ties · 316 SS			
KT6B046-200	200	4.6	300
KT6B078-350	350	7.8	800



KS652
Ball-Lokt™ tensioner & cutter for SS cable ties
Weight 600 gm





Cable management: reduces the risk of cutting or abrading cable



Ball-Lokt™ corrosion resistance is ideal for harsh marine environments

Instruction manuals

Tools & instructions

UES Promura
ENGINEERING & INDUSTRIAL SOLUTIONS
ESTABLISHED 1966

BAND-IT® Hose Clamps

Click a tool to save or open its instruction manual.



S750 pneumatic junior clamp tool

Operating & spare parts manual

Instruction manual



J001 adapter

For band widths less than 10 mm

Instruction manual



J050 heavy-duty adapter

For band widths greater than 10 mm

Instruction manual



UL4000-D cordless tool

18 V rechargeable

Instruction manual



T300 centre punch tool

Centre punch clamps

Instruction manual



C001 BAND-IT® tool

Bands 6–20 mm

Instruction manual



KS652 Ball-Lokt™ tool

Tensioner & cutter

Instruction manual



G402 Giant tool

Giant band

Instruction manual

▶ Watch the S750 pneumatic junior clamp tool video tutorial

Starting a project and need BAND-IT® stock?

We ship nationwide. Have a question? Our team is happy to help.

(03) 9547 5833
sales@uespromura.com.au
www.uespromura.com.au