BAND-IT AUSTRALIA — THE CLAMPING EXPERTS

SPECIFICATION DATA SHEET

26 October 2026


Rubber Cushion Sleeve

Thermoplastic Polyurethane

Two nominal sizes supplied on 30 m rolls

Product specification

Property	Specification
Application	General
Colour	Black
Environment	Indoor / outdoor
Flammability rating	UL 94 V-0 (as specified)

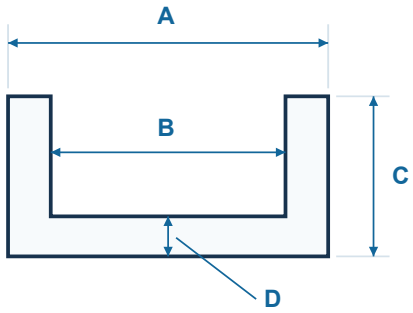

Profile schematic - not to scale

A Overall width B Internal width
C Overall height D Wall thickness

Temperature limits

Condition	Minimum	Maximum
Installation	-40 °C	90 °C
Operation	-40 °C	90 °C

Ordering codes and dimensions

UES code	Nominal size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Roll (m)
RCS TPU 15.88	15.88	23.1	16.8	9.7	3.0	30
RCS TPU 19.05	19.05	26.7	22.4	6.4	2.0	30

Packaging

Nominal size (mm)	Net weight per roll (kg)	Rolls per carton	Rolls per pallet	Gross pallet weight (kg)
15.88	3.6	5	160	610
19.05	5	3	96	510

Carton (L x W x H): 600 x 300 x 300 mm. 32 cartons per pallet.
Pallet (L x W x H): 1200 x 1200 x 1350 mm. Volume: approx. 1.94 m³.

Flammability rating reproduced from the supplied specification; test documentation was not supplied.

Sources: SPECIFICATIONS.xlsx (Sheet1!D28:E40); Packaging.xlsx (Sheet1!B4:E28);
UES product page

UES Promura | +61 3 9547 5833 sales@uespromura.com.au