



Air Line Requirements

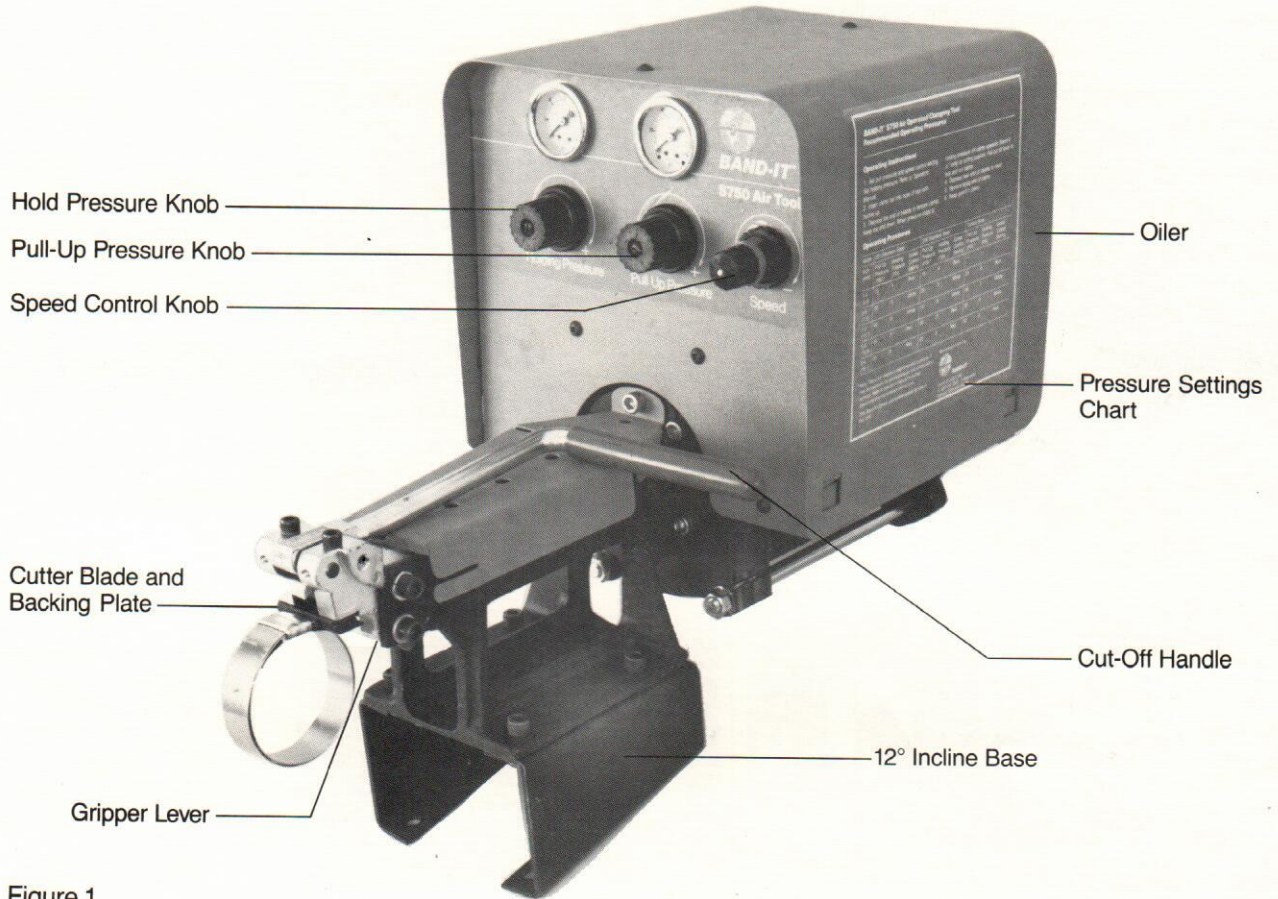


Figure 1

Air Line Requirements

Air Line Pressure: 100 PSI Minimum, 150 PSI Maximum

Consumption: 3-5 CFM

Line Size: 1/4" I.D. Minimum

Connection: 1/4" N.P.T.

Filter/Lubricator: Located in Air Supply in back of Air Tool.

Lubricant: SAE 10 Wt. Non-Detergent Motor Oil

Safety Procedures

1. Familiarize yourself with operating procedures before operating the S750 Air Tool.
2. Do not operate tool without cover in place.
3. Use only recommended Band-It preformed clamps.
4. Do not exceed recommended pressure settings. Excess pressure may cause sudden clamp failure during application or result in an unsafe clamp.
5. Always keep fingers clear of clamp during application.
6. Disconnect air supply before servicing air tool.
7. Tool must be firmly mounted (see Installation Instructions, Page 4).
8. Safety glasses or goggles should be worn when applying clamps.
9. Always keep tool in good operating condition.

